

**The unit loads your production line automatically by pushing PCB's out of a magazine onto the conveyor of the down-stream machine.**



### Standard features


- The magazine is manually placed on the platform and clamped in position.
- Flexible platform to suit standard magazines.
- Controlled by PLC.
- Exchange magazine from the rear of the machine.
- Regulated pressure on attached pneumatic pusher.
- Pusher position adjustable to center of the magazine.
- Towerlight display for machine status.
- Selectable pitch settings.
- CE certified.

### Technical specifications

Transfer height:	950 mm ± 25 mm
Colour:	RAL 9002
Flow direction:	Left to right
Fixed rail:	Front
Machine interface:	SMEMA
Power supply:	230 VAC/50 Hz/1 Ph
Power consumption:	240 VA max.
Air supply:	4-6 bar
Air consumption:	10 ltr/min max.
PCB loading time:	± 7 seconds
Pitch control:	1-4, 10 mm pitch
Maximum total magazine weight:	50 kg

### Options

No options available

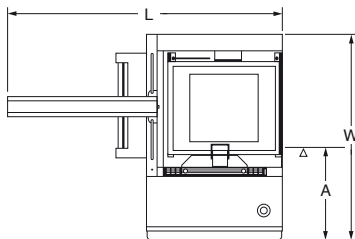

	<b>NTE 0710LL</b>
Machine dimensions (l x w x h)	1330 x 1005 x 1300 mm
Weight	180 kg
PCB length	80 mm - 460 mm
PCB width	50 mm - 460 mm
Magazine dimensions (max.)	535 x 530 x 570 mm
Fixed rail to front dimension (A)	452 mm