

The workstation is used where manual assembly work is performed on the PCB without removing it from the PCB assembly line.



Standard features


- Conveyor width adjusting using hand crank.
- Work and by-pass mode selectable.
- Controlled by PLC.
- ESD bracelet connection.
- Centre PCB stop position.
- Sliding parts shelf.
- Overhead lighting.
- CE certified.

Technical specifications

Transfer height	950 mm ± 25 mm*
Colour	RAL 9002*
Flow direction	Left to right*
Fixed rail	Front*
Machine interface	SMEMA*
Conveyor concept	ESD belt
Belt speed	14 m/min.
PCB edge support	3 mm
Components clearance	Top 30 mm, bottom 30 mm
Power supply	230 VAC/50 Hz/1 Ph
Power consumption	150 VA max.
	* or specify

Options

- Belt segment divided into 2 x 500 mm (work-buffer)
- Conveyor length of 1500 mm
- Foot rest
- Additional part shelf
- Variable speed per segment
- Dual speed per segment

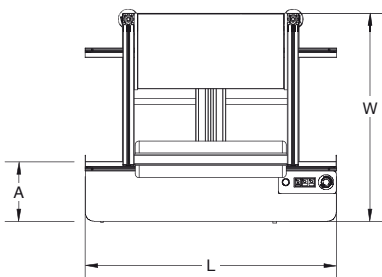

	NTE 0530WSL 1000
Machine dimensions (l x w x h)	1000 x 830 x 2190 mm
Weight	80 kg
PCB length	80 mm - 460 mm
PCB width	50 mm - 460 mm
Fixed rail to front dimension (A)	215 mm