

Dual track linking conveyor



NTM 410DT

This unit is to link between dual track production machines or board handling units.

Standard features

- Multi zones concept available, standard segment length is 500 mm.
- Conveyor width adjustment using hand crank.
- Two independently controlled ESD belt segments.
- Controlled by PLC.
- CE certified.



Technical specifications

Transfer height:	950 mm ± 25 mm*
Colour:	RAL 9002*
Flow direction:	Left to right*
Fixed rail:	Front*
Machine interface:	Dual lane SMEMA*
Conveyor concept:	ESD belt
Transport speed:	14 m/min.
PCB edge support:	3 mm
Components clearance:	Top 30 mm, bottom 30 mm
Power supply:	230 VAC/50 Hz/1 Ph
Power consumption:	100 VA max.
Fixed to fixed rail distance:	251 mm*

* or specify

Options

- Non standard conveyor/segment lengths
 - Adjustable 2nd, 3rd and 4th rail position using hand crank
 - Electrical conveyor width adjustment
 - Automatic conveyor width adjustment
 - Variable speed per segment
 - Dual speed per segment
 - Inspect function at exit sensor
 - Hinged top cover
- Other options available on request

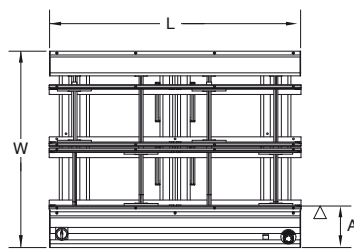

	NTM 410DT 500	NTM 410DT 1000
Machine dimensions (l x w x h)	500 x 820 x 980 mm	1000 x 820 x 980 mm
Weight	55 kg	90 kg
PCB length	80 mm - 457 mm	80 mm - 457 mm
PCB width	50 mm - 216 mm*	50 mm - 216 mm*
Fixed rail to front dimension (A)	168 mm	168 mm

* or specify