

# E-series Linking conveyor



NTE 0410L

**This unit is used to link between production machines or board handling units.**



## Standard features


- Conveyor width adjustment using hand crank.
- Inspect function at exit sensor.
- Controlled by PLC.
- CE certified.

## Technical specifications

Transfer height:	950 mm ± 25 mm
Colour:	RAL 9002
Flow direction:	Left to Right
Fixed rail:	Front
Machine interface:	SMEMA
Conveyor concept:	ESD belt
Belt speed:	14 m/min.
PCB edge support:	3 mm
Component clearance:	Top 30 mm, bottom 30 mm
Power supply:	230 VAC/50 Hz/1 Ph
Power consumption:	100 VA max.

## Options

- Belt segment divided into 2 x 500 mm

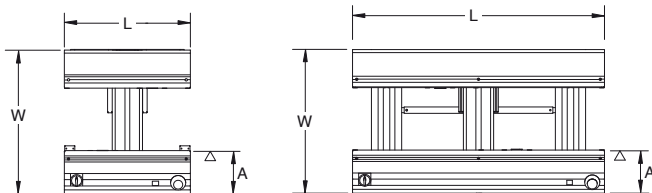

	<b>NTE 0410L 500</b>	<b>NTE 0410L 1000</b>
Machine dimensions (l x w x h)	500 x 745 x 980 mm	1000 x 745 x 980 mm
Weight	40 kg	70 kg
PCB length	80 mm - 460 mm	80 mm - 460 mm
PCB width	70 mm - 460 mm	70 mm - 460 mm
Fixed rail to front dimension (A)	186 mm	186 mm