

By manual lifting the conveyor section, access is gained to the rear of the line.



Standard features


- Conveyor width adjusting using hand crank.
- Gas spring supported opening and closing.
- Locking cylinder to avoid opening during PCB transfer.
- Controlled by PLC.
- CE certified.

Technical specifications

Transfer height:	950 mm ± 25 mm*
Colour:	RAL 9002*
Flow direction:	Left to right*
Fixed rail:	Front*
Machine interface:	SMEMA*
Conveyor concept:	ESD belt
Belt speed:	14 m/min.
PCB edge support:	3 mm
Components clearance:	Top 30 mm, bottom 30 mm
Power supply:	230 VAC/50 Hz/1 Ph
Passageway:	600 mm
Power consumption:	100 VA max.
Air supply:	4-6 bar
Air consumption:	negligible
	* or specify

Options

- Variable speed per segment
- Dual speed per segment
- Inspect function

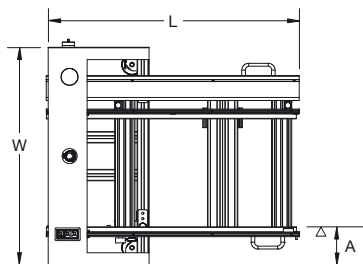

	NTE MGL 1000
Machine dimensions (l x w x h)	1000 x 860 x 1100 mm
Weight	80 kg
PCB length	80 mm - 460 mm
PCB width	50 mm - 460 mm
Fixed rail to front dimension (A)	127 mm