


The workstation is used where manual assembly work is performed on the PCB without removing it from the PCB assembly line.

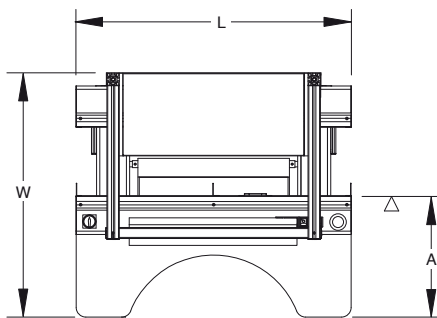

Standard features

- Multi zone concept available, standard segment length is 500 mm.
- Work and by-pass mode selectable.
- Conveyor width adjustment using hand crank.
- Centre PCB stop position
- Enhanced stability.
- Controlled by PLC.
- ESD bracelet connection.
- Foot rest.
- Sliding parts shelf.
- LED overhead lighting.
- CE certified.

Technical specifications

Transfer height:	950 mm ± 25 mm*
Colour:	RAL 9002*
Flow direction:	Left to right*
Fixed rail:	Front*
Machine interface:	SMEMA*
Conveyor concept:	ESD belt
Belt speed:	Fixed in 14 m/min, variable out 2-14 m/min.
PCB edge support:	3 mm
Components clearance:	Top 30 mm, bottom 30 mm
Power supply:	230 VAC/50 Hz/1 Ph
Power consumption:	150 VA max. * or specify

Options

- Non standard conveyor/segment lengths
 - Electrical conveyor width adjustment
 - Automatic conveyor width adjustment
 - Additional part shelf
 - Bin rail
 - PCB release foot switch
 - Variable speed per segment
 - Dual speed per segment
- Other options available on request

Standard lengths (X): 1000, 1500.

	NTM 530WSM (X)	NTM 530WSL (X)	NTM 530WSXL (X)
Machine dimensions (l x w x h)	(X) x 887 x 2190 mm	(X) x 1044 x 2190 mm	(X) x 1095 x 2190 mm
Weight	100 - 150 kg	110 - 160 kg	130 - 180 kg
PCB length	80 mm - 457 mm	80 mm - 457 mm	80 mm - 460 mm*
PCB width	50 mm - 250 mm	50 mm - 407 mm	50 mm - 460 mm*
Fixed rail to front dimension (A)	438 mm	438 mm	438 mm

* or specify